


- Digital IP65 or Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))



| Item No | Range | | Resolution | Accuracy | Base | Proof | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Recharge | Memory | WIRELESS | USB | Display | | |
|--------------------------------------|-------|-------|---------------|----------|------|-------|--------|---------|---------|---------|-------|-----------|-------------|-------------|----------|--------|----------|-----------|---------|----|-------|
| | mm | inch | | | | | | | | | | | | | | | | | | mm | µm |
| 110900155 | 0-150 | 0-6" | 0,001 | ±5 | 100 | IP-65 | | | | | | | | | | | | | | | |
| 110900205 | 0-200 | 0-8" | | ±6 | | | | | | | | | | | | | | | | | |
| 110900305 | 0-300 | 0-12" | | ±8 | | | | | | | | | | | | | | | | | |
| COMPUTERIZED DEPTH MICROMETER | | | | | | | | | | | | | | | | | | | | | |
| 110900158 | 0-150 | 0-6" | 0,0001 | ±4 | 100 | IP-65 | • | • | • | • | • | • | • | • | • | • | 2000 val | Long+ HID | USB HID | | |
| 110900208 | 0-200 | 0-8" | | ±5 | | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | 1,54" |
| 110900308 | 0-300 | 0-12" | | ±6 | | | • | • | • | • | • | • | • | • | • | • | • | • | • | • | • |

INSIDE MICROMETER

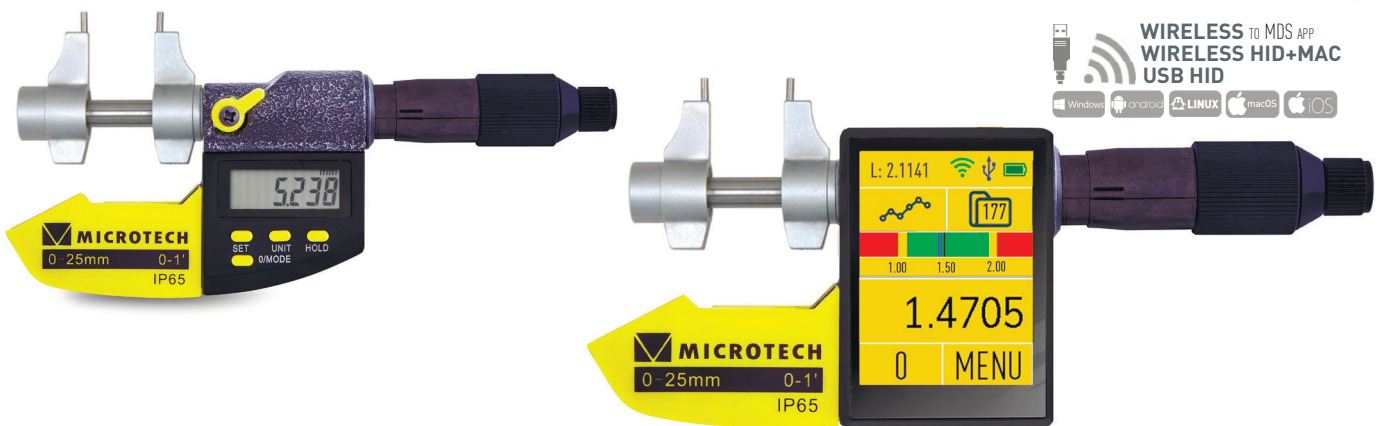

| Item No | Range | | Resolution | Accuracy | Anvils types | Setting ring | Proof | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Recharge | Memory | WIRELESS | USB | Display | | |
|--------------------------------------|--------|----------|---------------|----------|--------------|--------------|-------|--------|---------|---------|---------|-------|-----------|-------------|-------------|----------|----------|-----------|---------|---------|----|----|
| | mm | inch | | | | | | | | | | | | | | | | | | | mm | µm |
| 133800301 | 5-30 | 0.2-1.2" | 0,001 | ±5 | D 2mm | • | IP-65 | | | | | | | | | | | | | | | |
| 133800501 | 25-50 | 1-2" | | ±5 | R12mm | option | | | | | | | | | | | | | | | | |
| 133800751 | 50-75 | 2-3" | | ±6 | | | | | | | | | | | | | | | | | | |
| 133801001 | 75-100 | 3-4" | | ±6 | | | | | | | | | | | | | | | | | | |
| COMPUTERIZED POINT MICROMETER | | | | | | | | | | | | | | | | | | | | | | |
| 133800308 | 5-30 | 0.2-1.2" | 0,0001 | ±4 | D 2mm | • | IP-65 | • | • | • | • | • | • | • | • | • | 2000 val | Long+ HID | USB HID | | | |
| 133800508 | 25-50 | 1-2" | | ±4 | R12mm | option | | • | • | • | • | • | • | • | • | • | • | • | • | • | | |
| 133800758 | 50-75 | 2-3" | | ±4 | | | | | | • | • | • | • | • | • | • | • | • | • | • | • | |
| 133801008 | 75-100 | 3-4" | | ±4 | | | | | | • | • | • | • | • | • | • | • | • | • | • | • | • |