


# HOT SHEET METAL MICROMETER

- Max temperature of sheet metal up to **800°C**
- Upgraded construction by MICROTECH
- Calibration certificate included (ISO17025 (Ilac MRA))



Item No	Range	Resolution	Accuracy	Max temperature	Calibration
	mm	mm	µm	°C	ISO 17025
113010015	0-15	0,05	±150	800°	+
113010030	15-30	0,05	±200	800°	+
113010045	30-45	0,05	±200	800°	+
113010060	45-60	0,05	±200	800°	+
113010075	60-75	0,05	±200	800°	+
113010090	75-90	0,05	±200	800°	+
113010105	90-105	0,05	±200	800°	+
113010120	105-120	0,05	±200	800°	+
113010135	120-135	0,05	±200	800°	+
113010150	135-150	0,05	±200	800°	+
113010165	150-165	0,05	±200	800°	+
113010180	165-180	0,05	±200	800°	+
113010195	180-195	0,05	±300	800°	+
113010210	195-210	0,05	±300	800°	+
113010225	210-225	0,05	±350	800°	+
113010240	225-240	0,05	±350	800°	+
113010255	240-255	0,05	±350	800°	+
113010270	255-270	0,05	±400	800°	+
113010285	270-285	0,05	±400	800°	+
113010300	285-300	0,05	±400	800°	+
113010315	300-315	0,05	±400	800°	+
113010330	315-330	0,05	±400	800°	+
113010345	330-345	0,05	±450	800°	+
113010360	345-360	0,05	±500	800°	+
113010375	360-375	0,05	±500	800°	+
113010390	375-390	0,05	±500	800°	+
113010405	390-405	0,05	±500	800°	+

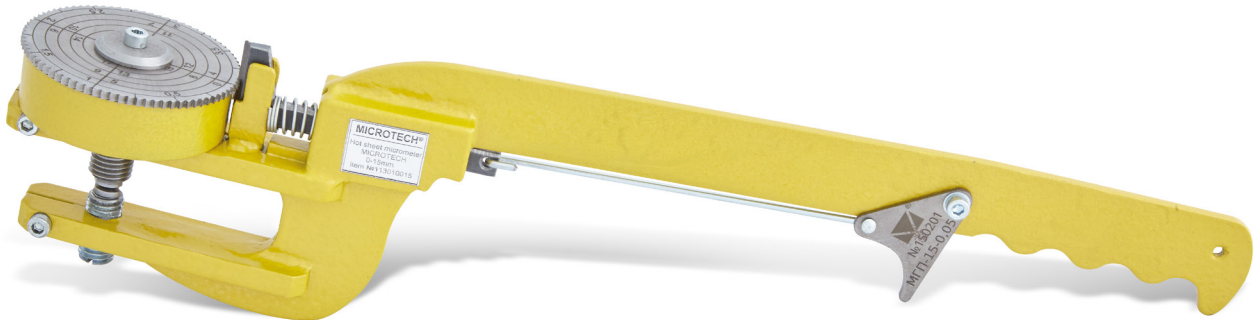