


2D THICKNESS GAUGE

- For deep and complex shapes measuring
- Control Z (jaws depth) and X (depth and range) axes
- Digital or computerized indication module
- Modification with Wireless data transfer to Windows, Android, iOS devices with distance up to 50 m
- Calibration certificate included (ISO17025 (Ilac MRA))



| Item No | Range | | Resolution | | Accuracy | | Indication | | Data output | Calibration |
|-----------|-------|-------|------------|-------|----------|-----|---|---|-------------|-------------|
| | Z | X | Z | X | Z | X | Z | X | | |
| | mm | mm | mm | mm | μm | μm | | | Wireless | ISO 17025 |
| 149020151 | 0-150 | 0-150 | 0,01 | 0,01 | ±30 | ±30 | Digital | Digital | - | + |
| 149020301 | 0-150 | 0-300 | 0,01 | 0,01 | ±30 | ±30 | | | - | + |
| 149020501 | 0-150 | 0-500 | 0,01 | 0,01 | ±30 | ±50 | | | - | + |
| 149020153 | 0-150 | 0-150 | 0,01 | 0,01 | ±30 | ±20 | Digital | computerized MICS system with 1,54" touchscreen | max 50 m | + |
| 149020303 | 0-150 | 0-300 | 0,01 | 0,01 | ±30 | ±20 | | | max 50 m | + |
| 149020503 | 0-150 | 0-500 | 0,01 | 0,01 | ±30 | ±40 | | | max 50 m | + |
| 149020157 | 0-150 | 0-150 | 0,01 | 0,001 | ±20 | ±15 | computerized MICS system with 1,54" touchscreen | computerized MICS system with 1,54" touchscreen | max 50 m | + |
| 149020307 | 0-150 | 0-300 | 0,01 | 0,001 | ±20 | ±15 | | | max 50 m | + |
| 149020507 | 0-150 | 0-500 | 0,01 | 0,001 | ±20 | ±20 | | | max 50 m | + |

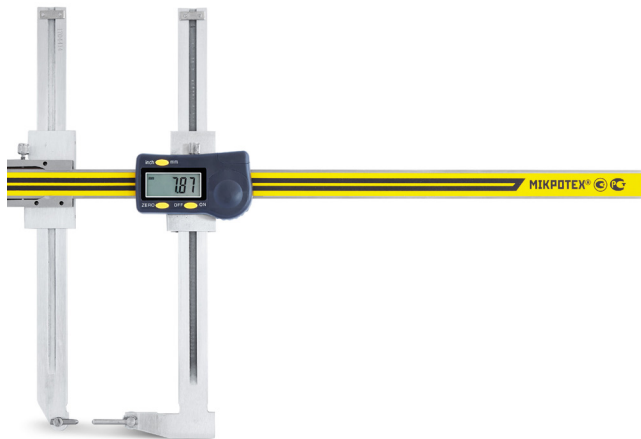