




LONG JAW DIGITAL CALIPER MICROTECH



ISO/IES 17025:2006 (cert. № 4K051)



Quality management system
ISO 9001:2015 (cert. № U228396)






1.MODIFICATIONS

Item No	Range	Resolution	Jaws	Accuracy
	mm	mm	mm	mm
141105111	0-500	0,01	100	±0,050
141105121	0-500	0,01	150	±0,050
141105151	0-500	0,01	300	±0,050
141110121	0-1000	0,01	150	±0,080
141110151	0-1000	0,01	300	±0,080
141115121	0-1500	0,01	150	±0,080
141115151	0-1500	0,01	300	±0,080
141120121	0-2000	0,01	150	±0,100
141120151	0-2000	0,01	300	±0,100
141125121	0-2500	0,01	150	±0,100
141125151	0-2500	0,01	300	±0,100

2.BUTTON FUNCTIONS

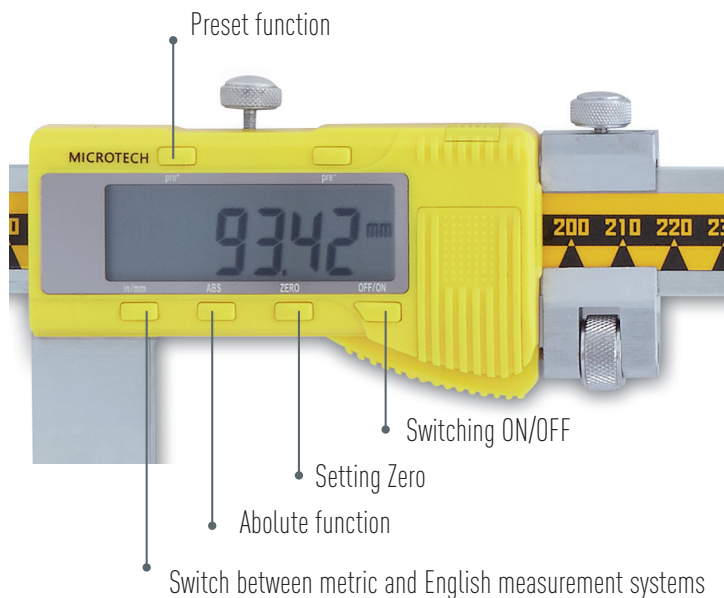



3. OPERATION INSTRUCTIONS

3.1 Wipe with a clean cloth, soaked in gasoline, measuring surface of the frame and gauge calipers to remove anti-corrosion oil. Then wipe them with a clean dry cloth.

3.2 If necessary, open the battery cover; insert the battery (type CR2032) according to the polarity of the electrodes. Blinking display information or absence suggests replacing battery.

3.3 During the measurement, measuring jaws should to sum to the measured object without knocking.

3.4 During the measurement avoid warps of measuring surfaces of the instrument. Measuring surface must be fully in contact with the measurement object

WARNING!

IN THE PROCESS OF WORKING WITH CALIPERS SHOULD BE AVOIDED:

Scratches on the measuring surfaces;

Measuring the size of object in the process of machining;

Shocks or dropping, avoid bending of rod or other surfaces.





4. INSTRUMENT FIGURE

