




Item No	Range		Range	Accuracy	eForce	Dimensions				Protection	Display	Carbide jaws	Data output
	mm	inch				A	B	C	D				
141097015A	0-150	0-6"	0,001	±5	1-20	235	40	10	16	IP-54	Color 1.5" Touch-screen	+	WIRELESS+USB
141077015A			0,005	±10									
141077015C			0,001	±8									
141097020A	0-200	0-8"	0,001	±8	1-20	290	50	10	18	IP-54	Color 1.5" Touch-screen	+	WIRELESS+USB
141077020A			0,005	±10									
141077020C			0,001	±8									
141097030A	0-300	0-12"	0,001	±8	1-20	395	60	11	21	IP-54	Color 1.5" Touch-screen	+	WIRELESS+USB
141077030A			0,005	±15									
141077030C			0,001	±8									



OPTIONAL ACCESSORIES

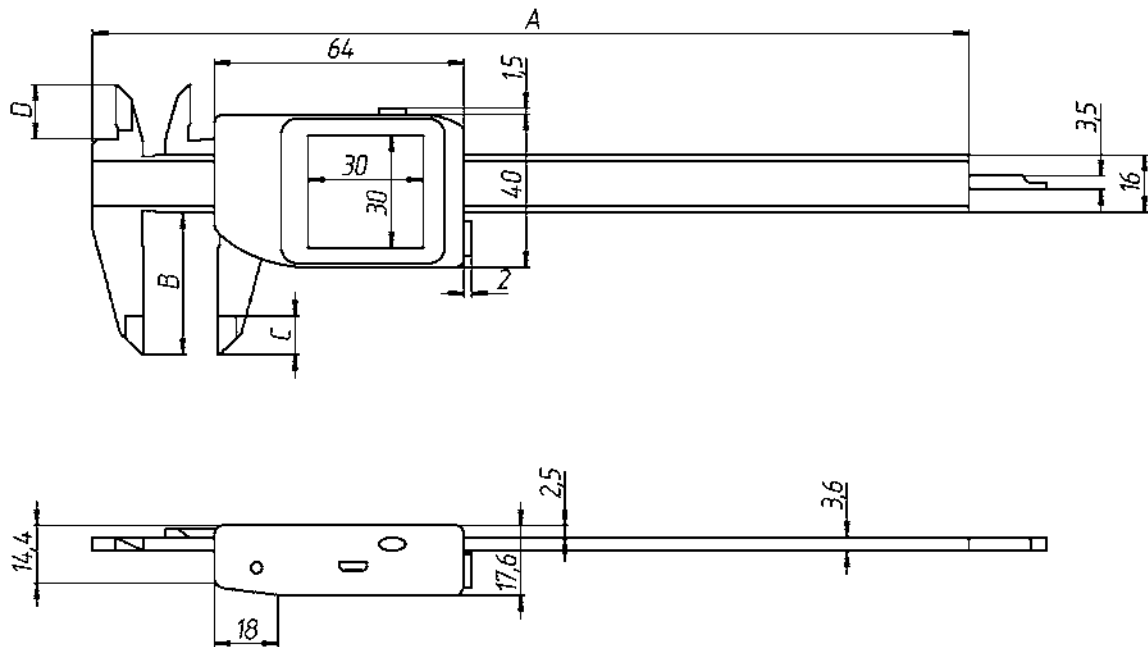

FUNCTIONS

- E-FORCE 1-20 N WITH AUTO MODE
- LIMITS (Go/NoGo)
- PEAK VALUES (MAX/MIN)
- MEMORY, WITH STATISTICS
- TIMER
- FORMULA  $AX^2+BX+C$
- MM/INCH
- PRESET
- CALIBRATION DATE CONTROL
- PIN LOCK

- LINEAR CORRECTION
- TEMPERATURE COMPENSATION
- RECHARGEABLE LI-POL BATTERY
- MAGNETIC CHARGING SOCKET

- WIRELESS** APPS FOR WINDOWS, ANDROID, iOS DATA TRANSFER TO MDS
- USB** HID DATA TRANSFER DIRECT TO WINDOWS, MacOS, ANDROID, LINUX APP'S