




- Industry 4.0 adopted E-Force caliper with computerized MICS system with hi-res 1,54" color Touchscreen
- Patents US10184772, UA174949, UA126928
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution select, Connection indication
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- E-Force control module with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Top quality Aluminium housing (CNC machined solid block)
- Calibration certificate included (ISO17025 (Ilac MRA))

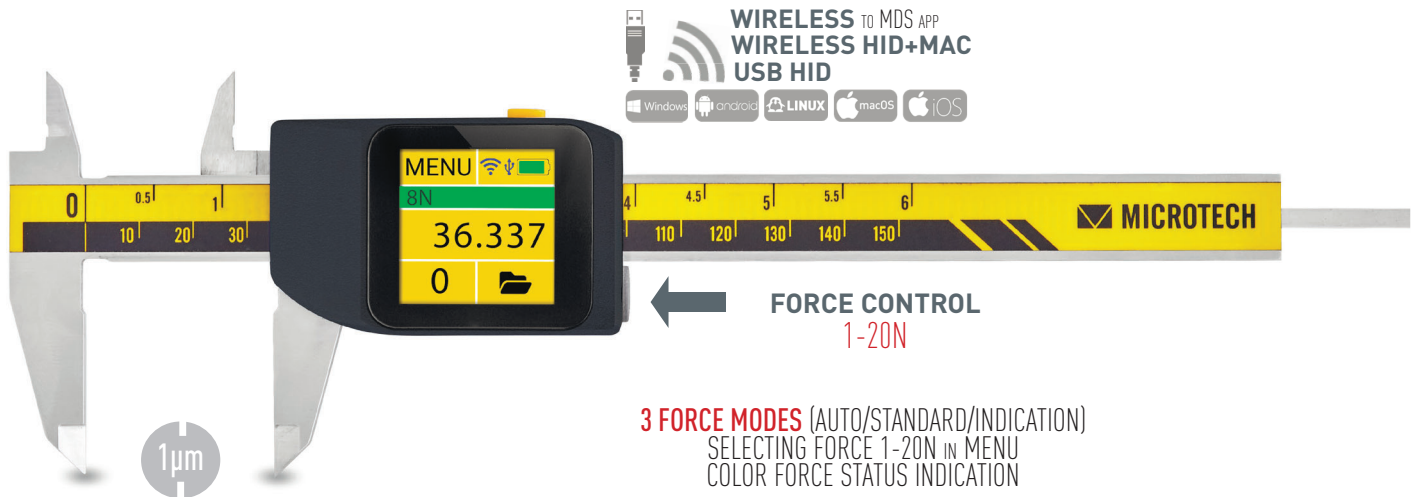

Item No	Range		Reso- lution	Accu- racy*	eForce	Jaws	Carbide jaws	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr.	Calibr date	Recharge	Auto off	Password	Memory	Folders	Statistics	WIRELESS to app	WIRELESS HID	USB HID	FW update	Display		
	mm	inch																									mm	µm
141097015A	0-150	0-6"	0,001	±5	1-20	40/16		•	•	•	•	•	•	•	•	•	•	•	2000 val	•	•	•	•	•	•	1.54" Touchscreen		
141077015A			0,005	±10			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•
141077015C			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•
141097020A	0-200	0-8"	0,001	±8	1-20	50/17		•	•	•	•	•	•	•	•	•	•	•	2000 val	•	•	•	•	•	•	1.54" Touchscreen		
141077020A			0,005	±10			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•
141077020C			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•
141097030A	0-300	0-12"	0,001	±10	1-20	60/20		•	•	•	•	•	•	•	•	•	•	•	2000 val	•	•	•	•	•	•	1.54" Touchscreen		
141077030A			0,005	±15			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•
141077030C			•	•			•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•

*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1

OPTIONAL ACCESSORIES



DOWNLOAD APP

