





WIRELESS
LONG RANGE



FREE SOFTWARE
Windows iOS Android

USB HID CONNECTION
macOS Windows Android
KEYBOARD MODE LINUX

0,1 μm



FEATURES

- Industry 4.0 adopted bore gauge with computerized MICS system
- Patented retractable construction for measuring of internal diameters, where a smaller bore lying in front of this diameter, has to be passed.
- Touchscreen operating on 1,54" full color display (240x240px)
- Updated ultra-quick reading system 15 values/sec
- Ergonomic navigation menu with quick access to all functions
- Memory for 3000 values with Folders system and Statistics
- Built-in Wireless long range data transfer module
- USB HID data transfer to any Windows, Linux, Android, macOS app with no special software in keyboard mode
- Free software for Windows PC and Android, iOS Smartphones
- Rechargeable internal Li-Pol battery throw USB socket
- Including calibration protocol (ISO17025 accredited lab)
- Complectation: bore gauge, USB magnetic cable, manual, calibration protocol, wooden box.

DOWNLOAD APP




FUNCTIONS

- LIMITS (Go/NoGo)
- PEAK VALUES (Max/Min)
- MEMORY, WITH STATISTICS
- TIMER
- FORMULA AX^2+BX+C / RADIUS
- MM/INCH
- PRESET
- CALIBRATION DATE CONTROL
- LINEAR CORRECTION
- TEMPERATURE COMPENSATION
- RECHARGEABLE LI-POL BATTERY
- MAGNETIC CHARGING SOCKET
- WIRELESS** APPS FOR WINDOWS, ANDROID, iOS
- USB** HID DATA TRANSFER DIRECT TO WINDOWS, MACOS, ANDROID, LINUX APP'S

MADE IN EUROPE

RETRACTABLE DIAL BORE GAUGES

Item No	Range D	Max A	Min H	Max H	Resolution	Accuracy		
	mm	mm	mm	mm	mm	µm		
139160100	70-160	20	D-30	150	0,01	±20		
139160111				1000		±30		
139250100	160-250			150		±20		
139250111				1000		±20		
139450100	250-450			150		±30		
139450111				1000		±30		
139550100	250-550			60		100+0,3*D	380	±30
139780100	480-780						400	±30
139910100	720-1020						400	±40

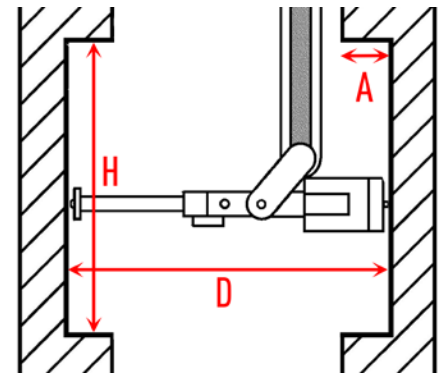

RETRACTABLE DIGITAL BORE GAUGES

Item No	Range D		Max A	Min H	Max H	Resolution	Accuracy	Al case		Preset	Max/Min	Go/NoGo	ABS			
	mm	inch						mm/inch								
139160800	70-160	2.8-6.5"	20	D-30	150	0,001	±15	•	•	•	•	•	•			
139160811					1000		±25	•	•	•	•	•				
139160822					2000		±30	•	•	•	•	•				
139160833					3000		±35	•	•	•	•	•				
139250800	160-250	6.5-10"			150		±15	•	•	•	•	•	•	•	•	
139250811					1000		±25	•	•	•	•	•	•	•	•	
139250822					2000		±30	•	•	•	•	•	•	•	•	•
139250833					3000		±35	•	•	•	•	•	•	•	•	•
139450800	250-450	10-18"			150		±15	•	•	•	•	•	•	•	•	•
139450811					1000		±25	•	•	•	•	•	•	•	•	•
139450822			2000	±30	•	•	•	•	•	•	•	•	•			
139450833			3000	±35	•	•	•	•	•	•	•	•	•			
139550800	250-550	10-22"	60	100+0,3*D	380	±24	•	•	•	•	•	•	•			
139780800	480-780	19-31"			400	±28	•	•	•	•	•	•	•	•		
139910800	720-1020	28-40"			400	±32	•	•	•	•	•	•	•	•		

RETRACTABLE COMPUTERIZED BORE GAUGES

Item No	Range D		Max A	Min H	Max H	Resolution	Accuracy	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Rotating disp	Energy saving	Menu	Recharge batt	PIN lock	Values	Folders	Statistic	Wireless	Wireless HID	USB HID	Color Display	Touchscreen													
	mm	inch																											mm	mm	mm	µm	Functions								
139160700	70-160	2.8-6.5"	20	D-30	150	0,0001	±12	•	•	•	•	•	•	•	•	•	•	•	•	•	•	3000	•	•	•	-	•	•													
139160711					1000		±20	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•			
139160722					2000		±25	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	
139160733					3000		±30	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	•
139250700	160-250	6.5-10"			150		±12	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•		
139250711					1000		±20	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	
139250722					2000		±25	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	•
139250733					3000		±30	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	•
139450700	250-450	10-18"			150		±12	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	
139450711					1000		±20	•	•	•	•	•	•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	•	•
139450722			2000	±25	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
139450733			3000	±30	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
139550700	250-550	10-22"	60	100+0,3*D	380	±18	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
139780700	480-780	19-31"			400	±21	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
139910700	720-1020	28-40"			400	±24	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								