



- Industry 4.0 adopted cranshaft coputerized tester with computerized MICS system with 1,54" color Touchscreen
- Patents UA126928, UA99686
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection indication
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- WIRELESS long range data transfer to Free MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (Ilac MRA))

Item No	Range		Measuring range		Resolution	Accuracy	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	Memory	Wireless	USB	Color Display
	mm	inch	mm	inch	mm	μm														
126050007	100-500	0-10	0-0.4"		0,0001	±20	•	•	•	•	•	•	•	•	•	•	•	•	•	•

DOWNLOAD APP




CO-AX COMPUTERIZED CENTERING INDICATOR

- Industry 4.0 adopted co-ax centering indicator with computerized MICS system with 1,54" color Touchscreen
- Patents UA126928, UA99686
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection indication
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- WIRELESS long range data transfer to Free MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (Ilac MRA))



Item No	Measuring range		Resolution	Accuracy	Complectation	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	Memory	Wireless	USB	Color Display
	mm	inch	mm	μm															
127050407	0-3,6	0-0,12"	0,0001	±10	center point feeler-1pcs straight feeler -3pcs curved feeler -3pcs	•	•	•	•	•	•	•	•	•	•	•	•	•	•

- 2D Thickness gauge for deep and complex shapes measuring. Control Z (jaws depth) and X (depth and range) axes
- Patents US10184772, UA144015, UA147949
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- WIRELESS long range data transfer to Free MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (Ilac MRA))

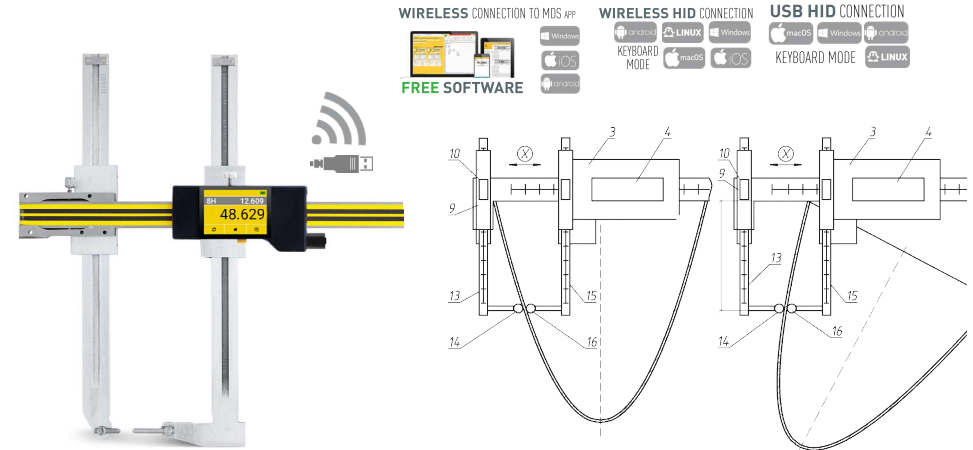

Item No	Range		Resolution		Accuracy		Display	2D connect	Probe connect	On-line Graphic	Analog scale	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	Memory	Wireless	USB	MODBUS	Color Display
	X	Z	Z	X	Z	X																				
	mm	mm	mm	mm	µm	µm																				
149020301	0-300	0-150	0.01	0.01	±30	±30	Digital	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
149020501	0-500				±50	±30		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
149020307	0-300		0.001	0.005	±15	±20	Comput.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
149020507	0-500				±20	±20		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

NONVOWEN MATERIALS STAND ISO 9073-2

- Measuring stand for non-vowen materials with measuring Force according ISO 9073-2
- Plates 100x100mm, 200x200mm
- Calibration certificate included (ISO17025 (Ilac MRA))

Item No	Range	Resolution	Base	Measuring plate	Plate Weight	Pressing
	mm	mm	mm	mm	g	kPa
1430300SP01	0-300	0,01	300x300	100x100	20.5+-0.5	0.02
1430300SP02				200x200	82+-2	

