





0,1µm

ISO 17025  
CALIBRATION

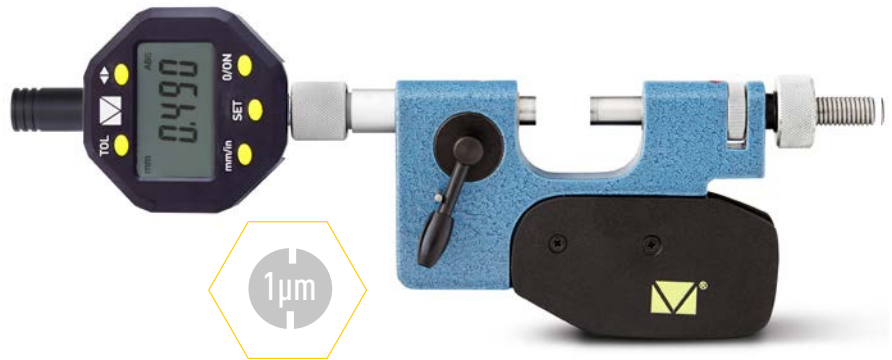

1µm

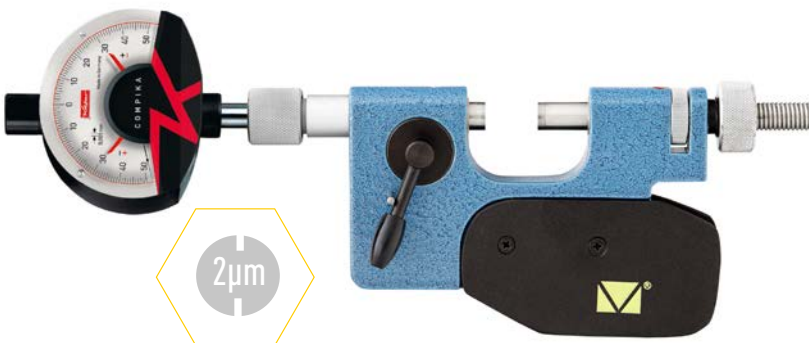

2µm

Item No	Range		Depth	Anvils type	DIAL	DIGITAL	COMPUTERIZED	
	mm	inch			res. 2 µm	res. 1 µm	resolution 0,1 µm	Data output
					Accuracy	Accuracy	Accuracy	
					µm	µm	µm	
115050050X	0-50	0-2"	18	D 8mm	±4	±4	±3	WIRELESS +USB
115050100X	50-100	2-4"	32		±4	±4	±4	
115050150X	100-150	4-6"	62		±6	±6	±4	
115050200X	150-200	6-8"	85		±6	±6	±4	
115050250X	200-250	8-10"	110		±8	±8	±6	
115050300X	250-300	10-12"	110		±8	±8	±7	
115050350X	300-350	12-14"	110		±10	±10	±8	
115050400X	350-400	14-16"	110		±10	±10	±9	
115050450X	400-450	16-18"	110		±12	±12	±10	
115050500X	450-500	18-20"	110		±12	±12	±10	

\*X in item No:

- 4-dial bore gauge with dial indicator 2 micron resolution
- 1-digital bore gauge with digital indicator 1 micron resolution
- 7-bore gauge with computerized indicator 0.1micron resolution

