


- Industry 4.0 adopted Tablet caliper with computerized MICS system with 2.4" color Touchscreen
- Patents US10184772, UA174949, UA126928
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- E-Force control module with Force selection 1-20N, color indication, AUTO-Force mode
- WIRELESS long range data transfer to Free MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (IlaC MRA))



Item No	Range		ResoL	Jaws	Accuracy	eForce	Measuring HUB	Analog scale	ON-line Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect status	Recharge batt	Memory	Wireless	USB	MODBUS PLC	Color Display				
	mm	inch																							mm	mm	µm	N
141005216			0,01	100	±30		•	•	•	•	•	•	•	•	•	•	•	•	•									
141005217			0,01		±20		•	•	•	•	•	•	•	•	•	•	•	•	•									
141005226	0-500	0-20"	0,01	150	±30		•	•	•	•	•	•	•	•	•	•	•	•	•									
141005227			0,001	150	±25		•	•	•	•	•	•	•	•	•	•	•	•	•	•								
141005256			0,01	300	±30		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
141005257			0,001	300	±30		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
141006216	0-630	0-25"	0,01	100	±30		•	•	•	•	•	•	•	•	•	•	•	•	•									
141006217			0,001	100	±20		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
141010216	0-1000	0-40"	0,01	150	±50		•	•	•	•	•	•	•	•	•	•	•	•	•									
141010217			0,001	150	±40		•	•	•	•	•	•	•	•	•	•	•	•	•	•								
141010256			0,01	300	±50		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
141010257			0,001	300	±40		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
141015216	0-1500	0-60"	0,01	150	±60		•	•	•	•	•	•	•	•	•	•	•	•	•									
141015256			0,01	300	±60		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
141020216	0-2000	0-80"	0,01	150	±60		•	•	•	•	•	•	•	•	•	•	•	•	•									
141020256			0,01	300	±70		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
141025256	0-2500	0-100"	0,01	300	±90		•	•	•	•	•	•	•	•	•	•	•	•	•									
141030256	0-3000	0-120"	0,01	300	±120		•	•	•	•	•	•	•	•	•	•	•	•	•									
141040256	0-4000	0-160"	0,01	300	±130		•	•	•	•	•	•	•	•	•	•	•	•	•									

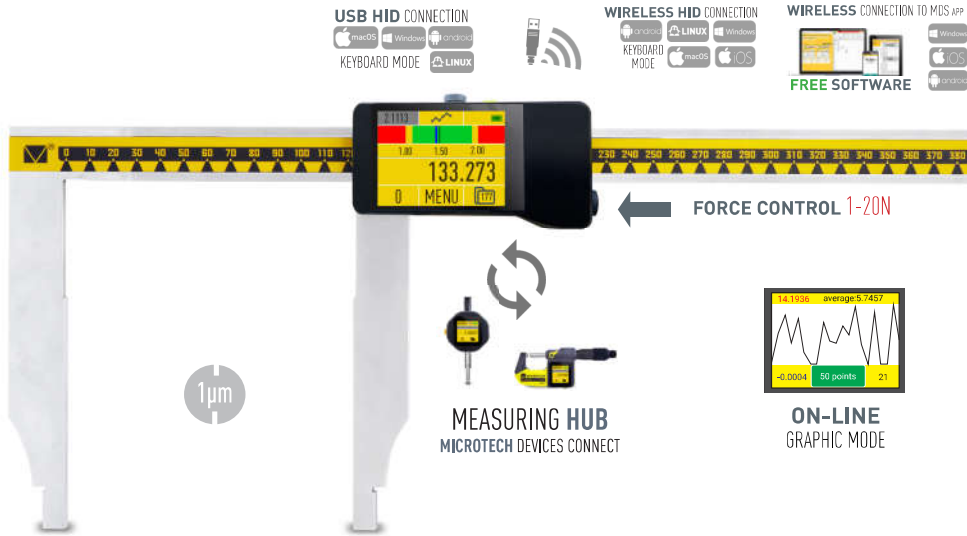

- Industry 4.0 adopted Extra long jaw Tablet caliper with computerized MICS system with 2.4" color Touchscreen
- Patents US10184772, UA111194, UA12361, UA121681
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Aluminium construction with precision roll sliding system
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- E-Force control module with Force selection 1-20N, color indication, AUTO-Force mode
- WIRELESS long range data transfer to Free MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (IlaC MRA))



Item No	Range		ResoL	Jaws	Accuracy	Weight	Measuring HUB	Analog scale	ON-line Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect status	Recharge batt	Memory	Wireless	USB	MODBUS PLC	Color Display					
	mm	inch																							mm	mm	µm	kg	
142411442	0-1000	0-40"		400	±40	10	•	•	•	•	•	•	•	•	•	•	•	•	•										
142415442	0-1500	0-60"		400	±50	11	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142115182			800	±85	12	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142120132	0-2000	0-80"		300	±60	17,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142120152			500	±85	18,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142120102			1000	±120	19,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142125132	0-2500	0-100"	0,01	300	±90	20,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142125152				500	±105	20,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
142125102	0-3000	0-120"		1000	±140	21,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142130132			300	±100	24,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142130152	0-3000	0-120"		500	±110	24,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142130102			1000	±160	25,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142135132	0-3500	0-140"		300	±120	26,5	•	•	•	•	•	•	•	•	•	•	•	•	•	•									
142135152			500	±160	27,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•								
142135102				1000	±240	28,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•									

OPTIONAL ACCESSORIES



ACCESSORIES FOR DATA TRANSFER

SPECIAL JAWS & ANVILS FOR REQUEST

DOWNLOAD APP

