



- Digital IP65 or Computerized MICS indication system Modification with Long range Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- Patents UA126928, UA99686
- Calibration certificate included (ISO17025 (Ilac MRA))

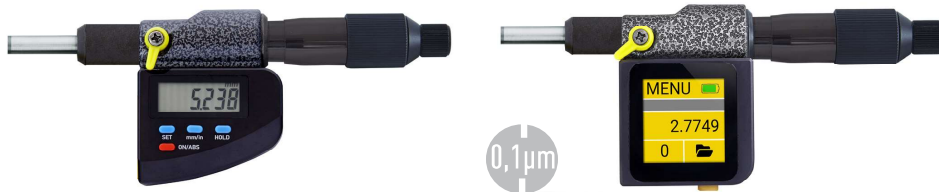

ON-LINE GRAPHIC MODE

SYNCHRONIZATION WITH EXTERNAL MICROTECH DEVICES

| Item No  | Range |      | Resol. | Accu-<br>racy | NON-ROTATING<br>Measuring HUB | ON-line Graphic<br>Analog scale | Preset | Go/NoGo<br>Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Connect. status | Recharge batt | Memory | Wireless | USB | MODBUS | Color Display     |    |
|--|-------|------|--------|---------------|-------------------------------|---------------------------------|--------|--------------------|---------|-------|-----------|-------------|-------------|-----------------|---------------|--------|----------|-----|--------|-------------------|----|
|  | mm    | inch |        |               |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   | mm |
| <b>DIGITAL MICROMETER IP65</b>                 |       |      |        |               |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110180020                                      | 0-25  | 0-1" | 0.001  | ±2            | •                             |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110170020                                      | 0-25  | 0-1" |        |               |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110181050                                      | 0-50  | 0-2" |        | ±4            |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| <b>SUB-MICRON COMPUTERIZED MICROMETER IP65</b> |       |      |        |               |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110180027                                      | 0-25  | 0-1" | 0.001  | ±1.5          | •                             |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        | Touchscreen 1,54" |    |
| 110181027                                      | 0-25  | 0-1" |        | ±1.5          |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110181057                                      | 0-50  | 0-2" |        | ±2.5          |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| <b>SUB-MICRON TABLET MICROMETER IP65</b>       |       |      |        |               |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110180029                                      | 0-25  | 0-1" | 0.001  | ±1.5          | •                             |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        | Touchscreen 2,4"  |    |
| 110181029                                      | 0-25  | 0-1" |        | ±1.5          |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |
| 110181059                                      | 0-50  | 0-2" |        | ±2.5          |                               |                                 |        |                    |         |       |           |             |             |                 |               |        |          |     |        |                   |    |

DOWNLOAD APP



- Digital IP65 or Computerized MICS indication system Modification with Long range Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- Calibration certificate included (ISO17025 (Ilac MRA))



Pat.US99686

| Item No                              | Range |       | Resolution | Accuracy | Base | Proof | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Connect. status | Recharge batt | Memory | Wireless | USB | Color Display |    |    |    |
|--------------------------------------|-------|-------|------------|----------|------|-------|--------|---------|---------|---------|-------|-----------|-------------|-------------|-----------------|---------------|--------|----------|-----|---------------|----|----|----|
|                                      | mm    | inch  |            |          |      |       |        |         |         |         |       |           |             |             |                 |               |        |          |     |               | mm | μm | mm |
| 1109000158                           | 0-150 | 0-6"  | 0.001      | ±5       | 100  | IP-65 |        |         |         |         |       |           |             |             |                 |               |        |          |     |               |    |    |    |
| 1109000208                           | 0-200 | 0-8"  |            | ±6       |      |       |        |         |         |         |       |           |             |             |                 |               |        |          |     |               |    |    |    |
| 1109000308                           | 0-300 | 0-12" |            | ±8       |      |       |        |         |         |         |       |           |             |             |                 |               |        |          |     |               |    |    |    |
| <b>COMPUTERIZED DEPTH MICROMETER</b> |       |       |            |          |      |       |        |         |         |         |       |           |             |             |                 |               |        |          |     |               |    |    |    |
| 1109000158                           | 0-150 | 0-6"  | 0.001      | ±4       | 100  | IP-65 | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      | •        | •   | •             |    |    |    |
| 1109000208                           | 0-200 | 0-8"  |            | ±5       |      |       |        |         | •       | •       | •     | •         | •           | •           | •               | •             | •      | •        | •   | •             | •  | •  | •  |
| 1109000308                           | 0-300 | 0-12" |            | ±6       |      |       |        |         | •       | •       | •     | •         | •           | •           | •               | •             | •      | •        | •   | •             | •  | •  | •  |

SNAP GAUGE



Pat.US99686

| Item No    | Range   |        | Depth | Anvils<br>type | DIAL | DIGITAL   | COMPUTERIZED *X=7 |                   |          |          |        |         |         |         |       |           |             |             |                 |               |        |
|------------|---------|--------|-------|----------------|------|-----------|-------------------|-------------------|----------|----------|--------|---------|---------|---------|-------|-----------|-------------|-------------|-----------------|---------------|--------|
|            | mm      | inch   |       |                | mm   | *X=4      | *X=1              | resolution 0,1 μm |          |          |        |         |         |         |       |           |             |             |                 |               |        |
|            |         |        |       |                |      | res. 2 μm | res. 1 μm         | Accuracy          | Accuracy | Accuracy | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Connect. status | Recharge batt | Memory |
| 115050050X | 0-50    | 0-2"   | 18    | D 8mm          | ±4   | ±4        | ±3                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050100X | 50-100  | 2-4"   | 32    |                | ±4   | ±4        | ±4                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050150X | 100-150 | 4-6"   | 62    |                | ±6   | ±6        | ±4                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050200X | 150-200 | 6-8"   | 85    |                | ±6   | ±6        | ±4                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050250X | 200-250 | 8-10"  | 110   |                | ±8   | ±8        | ±6                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050300X | 250-300 | 10-12" | 110   |                | ±8   | ±8        | ±7                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050350X | 300-350 | 12-14" | 110   |                | ±10  | ±10       | ±8                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050400X | 350-400 | 14-16" | 110   |                | ±10  | ±10       | ±9                | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050450X | 400-450 | 16-18" | 110   |                | ±12  | ±12       | ±10               | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |
| 115050500X | 450-500 | 18-20" | 110   |                | ±12  | ±12       | ±10               | •                 | •        | •        | •      | •       | •       | •       | •     | •         | •           | •           | •               | •             | •      |