


- Industry 4.0 adopted sub-micron Computerized test indicator with computerized MICS system color Touchscreen
- Patents UA126928, UA99686
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- WIRELESS long range data transfer to **Free** MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app like keyboard
- Calibration certificate included (ISO17025 (Ilac MRA))

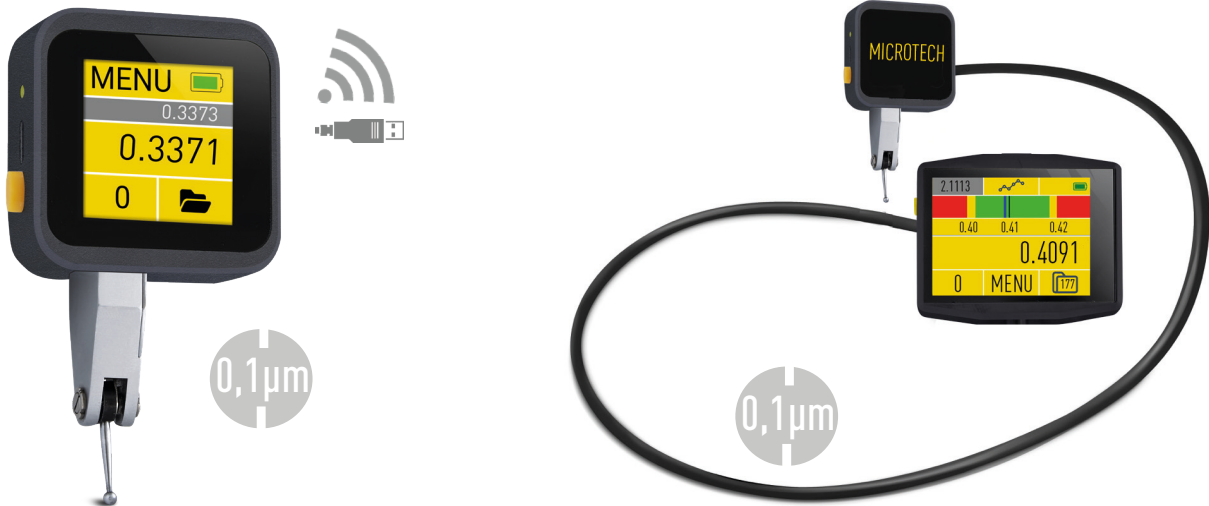

Item No	Range		Resol.	Accu- racy	Probe	Measur- ing Force	Cable length	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	Memory	Wireless	USB	Color Display	
	mm	inch	mm	µm	mm	N	m															
120129018					12,8	0,1-0,18	Built-in	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update	1.54'	
120129013	-0.8	-0.03"	0,0001	±5	35,7		Built-in	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
120129019L	+0.8	+0.03"			12,8		2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
120129019L10					12,8		10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

SUB-MICRON COMPUTERIZED DIAL COMPARATOR

- Industry 4.0 adopted sub-micron Computerized dial comparator with 0.1 micron resolution
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- WIRELESS long range data transfer to **Free** MICROTECH SPC app for Windows, Android, iOS
- WIRELESS HID & USB HID data transfer to any Windows, Linux, Android, macOS app
- Calibration certificate included (ISO17025 (Ilac MRA))

Item No	Range	Resolution	Accuracy	Force	Stem D	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect.	Recharge batt	Memory	Wireless	USB	Color Display
	mm	mm	µm	N	mm														
120120288	0.03	0,0001	±0.5	1.8-2.2	28	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update	2.4'

