





- Wide range micrometer with Solid or Modular construction up to 10 m
- Patents UA108044, UA99686, UA2022050400
- Digital IP65 or Computerized MICS indication system Modification with Long range Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- Calibration certificate included (ISO17025 (Ilac MRA))

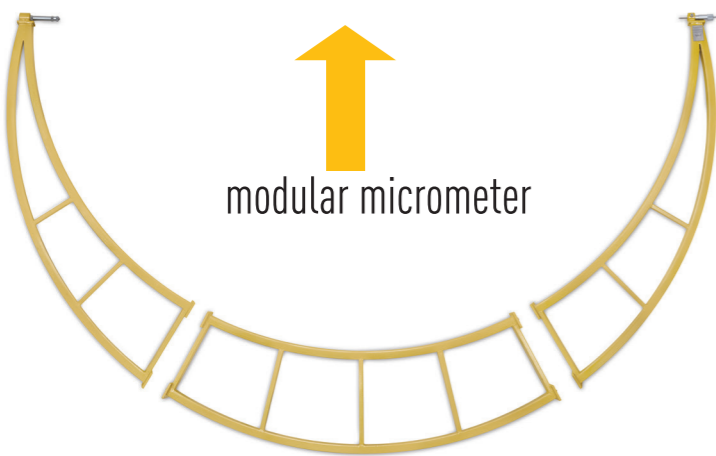

ON-LINE GRAPHIC MODE

DOWNLOAD APP



MADE IN UKRAINE

Item No	Range		Resol.	Accuracy	Micrometer head range	Weight	Setting rod
	mm	inch					
110174001	300-400	12-15"	0,001	±7	25	1,9	+
110175001	400-500	15-20"		±7		2,2	+
110176001	500-600	20-24"		±8		2,6	+
110177001	600-700	24-28"		±8		2,9	+
110178001	700-800	28-32"		±15		4,8	+
110179001	800-900	32-36"		±15		5,5	+
110171101	900-1000	36-40"		±15		6,7	+
110171201	1000-1200	40-48"		±18		9,2	+
110171401	1200-1400	48-56"		±20		11,0	+
110171601	1400-1600	56-64"		±25		13,3	+
110171801	1600-1800	64-72"	±30	16,2	+		
110172001	1800-2000	72-80"	±35	19,5	+		
110172201	2000-2200	80-88"	±40	25	+		
110172401	2200-2400	88-96"	±45	27	+		
110172601	2400-2600	96-104"	±50	28,5	+		
110172801	2600-2800	104-112"	±55	30,5	+		
110173101	2800-3000	112-120"	±60	33	+		



Item No	Range		Resol.	Accuracy	Micrometer head range	Weight	Setting rod	Measuring HUB	ON-line Graphic	Analog scale	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	2D Sync	Memory	Wireless	USB	Color Display		
	mm	inch																								mm	µm
110184008	300-400	12-15"	0,0001	±5	25	1,9	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110185008	400-500	15-20"		±5		2,2	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110186008	500-600	20-24"		±6		2,6	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110187008	600-700	24-28"		±7		2,9	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110188008	700-800	28-32"		±8		4,8	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110189008	800-900	32-36"		±10		5,5	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110181108	900-1000	36-40"		±10		6,7	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110181208	1000-1200	40-48"		±14		9,2	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110181408	1200-1400	48-56"		±16		11,0	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110181608	1400-1600	56-64"		±20		13,3	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110181808	1600-1800	64-72"	±24	16,2	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110182008	1800-2000	72-80"	±30	19,5	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110182208	2000-2200	80-88"	±33	25	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110182408	2200-2400	88-96"	±36	27	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110182608	2400-2600	96-104"	±40	28,5	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110182808	2600-2800	104-112"	±42	30,5	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
110183108	2800-3000	112-120"	±45	33	+	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		

Item No	Range		Resol.	Accur.	Modules	Micrometer head range	Setting rod	Weight	Measuring HUB	ON-line Graphic	Analog scale	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	2D Sync	Memory	Wireless	USB	Color Display	
	mm	inch																									mm
110160155	1000-1500	40-60"	0,0001	±28	2	50	+	18	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
110160205	1500-2000	60-80"		±32	2		+	22	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160305	2000-3000	80-120"		±50	3		+	35	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160405	3000-4000	120-160"		±60	4		+	47	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160505	4000-5000	160-200"		±75	5		+	60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160605	5000-6000	200-240"		±90	6		+	79	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160705	6000-7000	240-280"		±105	7		+	95	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160805	7000-8000	280-320"		±120	8		+	115	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110160905	8000-9000	320-360"		±135	9		+	136	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
110161005	9000-10000	360-400"		±150	10		+	160	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

MADE IN UKRAINE