





Item No	Range	Resolution	Accuracy	Depth	Contact points D	
					Standard	Optional
	mm	mm	µm	mm	mm	mm
137001021	0-1	0.001	±5	25	6,35	Flat d 12, 16, 20, 25, 30, 35, 40 Point D 0.3 Blade 0.7
137010121	0-10	0.01	±30	120	10	
137020121	0-20		±40	120		
137025201	0-25		±40	200		
137025401			±50	400		
137050201	0-50		±50	200		
137050301			±60	300		
137050401			±70	400		
137050601			±80	600		
137050801			±90	800		
137100201	0-100		±50	200		
137100401			±70	400		
137100601			±80	600		
137100801			±100	800		

DIGITAL THICKNESS GAUGES

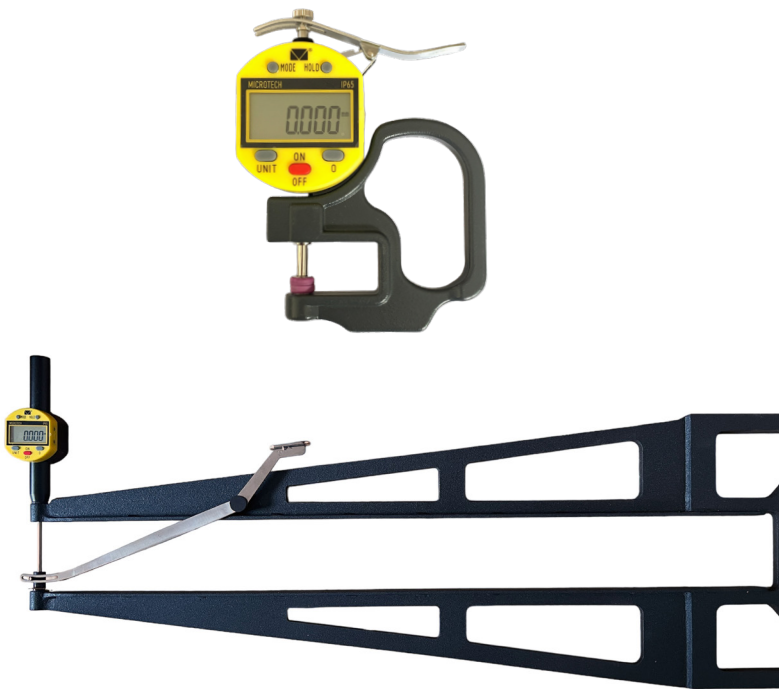

Item No	Range	Resolution	Accuracy	Depth	Contact points D	
					Standard	Optional
	mm	mm	µm	mm	mm	mm
137001028	0-1	0.001	±3	25	6,35	Flat d 12, 16, 20, 25, 30, 35, 40 Point D 0.3 Blade 0.7
137010128	0-10		±12	120	10	
137020128	0-20		±15	120		
137025208	0-25		±18	200		
137025408			±25	400		
137050208	0-50		±20	200		
137050308			±25	300		
137050408			±30	400		
137050608			±35	600		
137050808			±40	800		
137100208	0-100		±20	200		
137100408			±30	400		
137100608			±40	600		
137100808			±55	800		
137150408	0-150		±55	400		
137150808		±80	800			
137230408	150-300	±70	400			
137230808		±95	800			

CONTACT POINTS

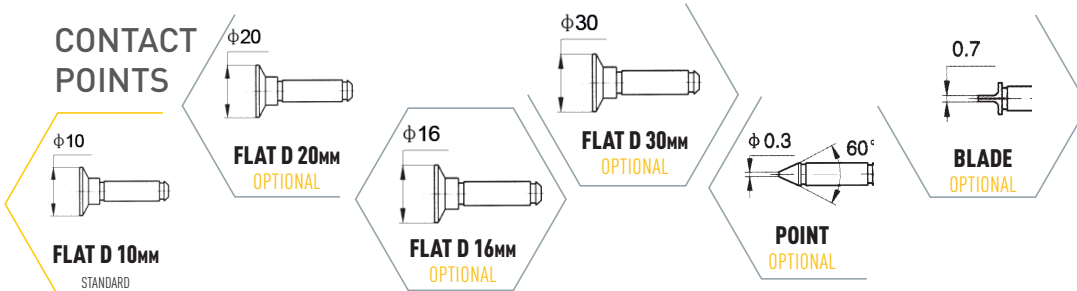


- Industry 4.0 adopted sub-micron Computerized thickness gauge with range up to 150mm and depth up to 800mm
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



Item No	Range	Resolution	Accuracy	Depth	Contact points D		Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Connect. status	Recharge batt	Memory	Wireless	USB	Color Display		
					Standard	Optional																
	mm	mm	µm	mm	mm	mm																
137001027	0-1	0.0001	±3	25	6,35	10	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Wireless	USB	Color Display		
137010127	0-10		±8	120	Flat d 12, 16, 20, 25, 30, 35, 40 Point D 0.3 Blade 0.7		•	•	•	•	•	•	•	•	•	•					•	
137020127	0-20		±12	120			•	•	•	•	•	•	•	•	•	•					•	•
137025207	0-25		±15	200			•	•	•	•	•	•	•	•	•	•					•	•
137025407			±20	400			•	•	•	•	•	•	•	•	•	•					•	•
137050207	0-50		±18	200			•	•	•	•	•	•	•	•	•	•					•	•
137050307			±20	300			•	•	•	•	•	•	•	•	•	•					•	•
13705047X			±22	400			•	•	•	•	•	•	•	•	•	•					•	•
137050607			±30	600			•	•	•	•	•	•	•	•	•	•					•	•
137050807	0-100		±35	800			•	•	•	•	•	•	•	•	•	•					•	•
137100207			±15	200			•	•	•	•	•	•	•	•	•	•					•	•
137100407			±24	400			•	•	•	•	•	•	•	•	•	•					•	•
137100607	0-150		±32	600			•	•	•	•	•	•	•	•	•	•					•	•
137100807			±44	800			•	•	•	•	•	•	•	•	•	•					•	•
137150407			±50	400			•	•	•	•	•	•	•	•	•	•					•	•
137150807	150-300		±70	800			•	•	•	•	•	•	•	•	•	•					•	•
137230407		±60	400	•		•	•	•	•	•	•	•	•	•	•	•						
137230807		±85	800	•	•	•	•	•	•	•	•	•	•	•	•							

OPTIONAL ACCESSORIES

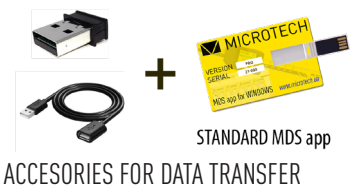

DOWNLOAD APP

