


- Bore calipers for bore reading without removing the bar
- Modification with **CONSTANT** Force module for high accuracy and repeatability
- Digital IP54 or Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))

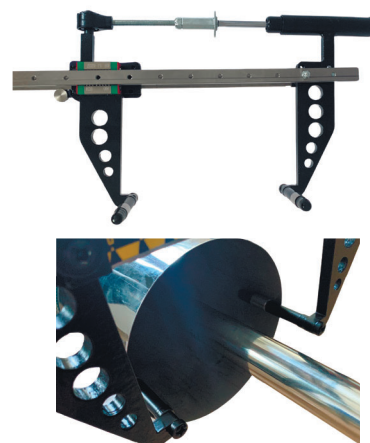

Item No	Range				Reso- lution	Accu- racy	Jaws			Max bore D	Roll system	Constant Force	Measuring HUB	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	Display
	Internal		External				Down	Depth	Anvil D																			
	mm	inch	mm	inch																								
BORE DIGITAL CALIPER IP54																												
141851122	22-300	0.9-12"	0-300	0-6"	0,01	±40	40	50							•													Digital
141851152	24-500	1-20"	0-500	0-20"		±60	60	60							•													
141851162	30-600	1.2-24"	0-600	0-24"		±90	90	100							•													
BORE COMPUTERIZED CALIPER IP54																												
141851127	22-300	0.9-12"	0-300	0-6"	0,01	±30	40	50							•	•	•	•	•	•	•	•	•	•				Folders / 2000 val Long range / HID USB HID / Update Touchscreen 2.4"
141851157	24-500	1-20"	0-500	0-20"		±40	60	60							•	•	•	•	•	•	•	•	•	•				
141851167	30-600	1.2-24"	0-600	0-24"		±70	90	100							•	•	•	•	•	•	•	•	•	•				
CONSTANT FORCE BORE COMPUTERIZED CALIPER																												
141851037	20-300	0.9-12"	-		0,01	±20	100	60	10	180	•	•	•	•	•	•	•	•	•	•	•	•	•	•		Folders / 2000 val Long range / HID USB HID / Update Touchscreen 2.4"		
141851057	30-500	1-20"				±35	150	100	14	270	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
141851107	50-1000	2-40"				±40	150	100	14	270	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
141851157	1000-1500	40-60"				±45	200	150	18	370	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
141851207	1500-2000	60-80"				±55	250	150	18	460	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
141851257	2000-2500	80-100"				±60	300	200	26	550	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			