


- Industry 4.0 adopted sub-micron 3-point internal micrometer with computerized MICS system with 1,54" color Touchscreen
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



0,1μm

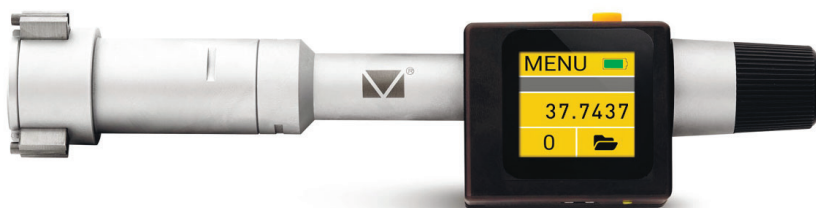

Item No	Range		Resolution	Accur.	Max depth	Setting ring	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	Display
	mm	inch																	
133700210	2-2,5	0.08-0.09"	0,0001	±3	12.5	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update	Touchscreen 1,54"
133700310	2,5-3	0.09-0.12"		±3	12.5	•	•	•	•	•	•	•	•	•	•				
133700410	3-4	0.12-0.16"		±3	22.5	•	•	•	•	•	•	•	•	•	•				
133700510	4-5	0.16-0.20"		±3	22.5	•	•	•	•	•	•	•	•	•	•				
133700610	5-6	0.20-0.24"		±4	22.5	•	•	•	•	•	•	•	•	•	•				
133700810	6-8	0.24-0.32"		±4	154	•	•	•	•	•	•	•	•	•	•				
133701010	8-10	0.32-0.4"		±4	154	•	•	•	•	•	•	•	•	•	•				
133701210	10-12	0.4-0.5"		±4	154	•	•	•	•	•	•	•	•	•	•				
133701610	12-16	0.5-0.63"		±4	230	•	•	•	•	•	•	•	•	•	•				
133702010	16-20	0.63-0.8"		±4	230	•	•	•	•	•	•	•	•	•	•				
133702510	20-25	0.8-1"		±4	240	•	•	•	•	•	•	•	•	•	•				
133703010	25-30	1-1.2"		±4	240	•	•	•	•	•	•	•	•	•	•				
133704010	30-40	1.2-1.6"		±4	240	•	•	•	•	•	•	•	•	•	•				
133705010	40-50	1.6-2"		±4	240	•	•	•	•	•	•	•	•	•	•				
133707010	50-70	2-3"		±4	250	•	•	•	•	•	•	•	•	•	•				
133710010	70-100	3-4"		±4	250	•	•	•	•	•	•	•	•	•	•				
133715010	100-150	4-6"		±4	250	•	•	•	•	•	•	•	•	•	•				
133725010	150-250	6-10"		±5	250	•	•	•	•	•	•	•	•	•	•				
133730010	200-300	8-12"		±6	250	•	•	•	•	•	•	•	•	•	•				
133750010	200-500	8-20"		±8	650	option	•	•	•	•	•	•	•	•	•				
133790011	200-1000	8-40"		±11	1150	•	•	•	•	•	•	•	•	•	•				

SET's

Item No	Range	Measuring heads	Setting rings	Max depth
	mm			mm
133700203	2-3	2 pcs	1pcs	12,5
133370306	3-6	3 pcs	3pcs	22,5
133370612	6-12	3 pcs	3pcs	50+100
133371220	12-20	2pcs	1pcs	80+150
133372050	20-50	4pcs	2pcs	90+150
133375090	50-100	2pcs	1pcs	107+150
133579125	100-250	2pcs	1pcs	107+150

EXTENSIONS

Item No	For Range	Length	Modules
	mm	mm	qty
133020100	20-30	1000	1
133020200		2000	1
133050100	30-50	1000	1
133050200		2000	1
133090050	50-1000	500	1
133090100		1000	1
133090200		2000	2
133090300		3000	3

DOWNLOAD APP



MADE IN UKRAINE