

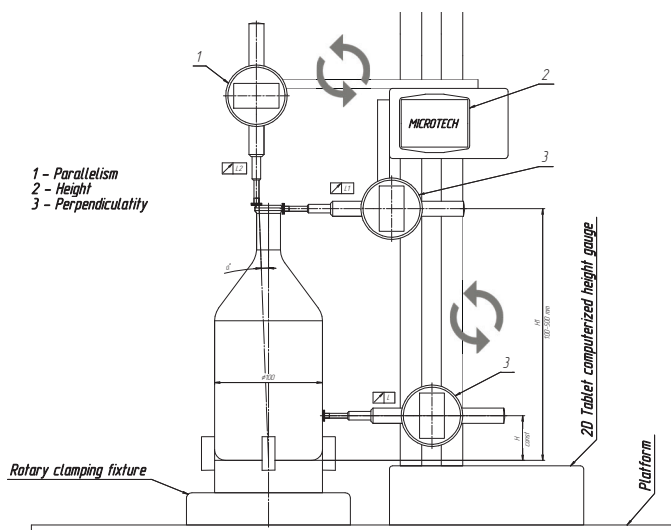


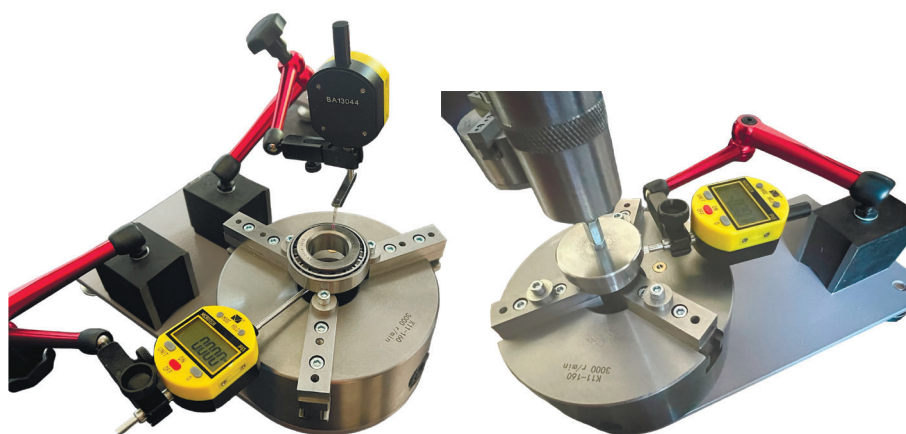

Item No	Range	Max bottle height	Resolution	Accuracy	Rotary fixture	Quick clamp	Parallelism	Perpendicularity	Height	Measuring & protocol	Data output
254910000	mm	mm	mm	mm							WIRELESS
254920000	20-100	310	0,0001	±0,040	•	•	•	•			+USB
	50-200	500		±0,025	•	•	•	•	•	auto/ 1 install	

BEARING KIA SIA KEA CONTROL STAND

- Bearing control stand KIA, SIA, KEA
- Completing with 3pcs indicators (Computerized or Digital), 3 magnetic stands, set of Weights for internal & external bearing control
- Digital or Computerized **MICS** indication system Modification with Long range Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- Calibration** certificate included (ISO17025 (Ilac MRA))

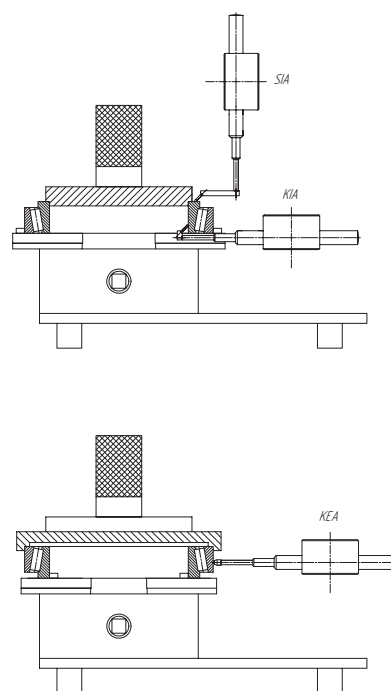

CUSTOM RANGE FOR REQUEST

Item No	Range		Resolution	Repeatability	Weights		Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	Display
	internal SIA	external KIA			internal SIA	external KIA													
	mm	mm			mm	mm													
255500001	20-200	10-140	0,001	0,005	10-40N	12-40N	•	•	•	•	•	•	•	•	•	•	•	•	•
255500007			0,0001		22pcs	23pcs	•	•	•	•	•	•	•	•	•	•	•	•	•