

- Industry 4.0 adopted Tablet double column micron height gauge with computerized MICS system with 3.5" color Touchscreen
- **MOTORIZED** height gauge with AUTO measuring modes
- Touch-trigger Probe with interchangeable Stylus M2.5 (compatible with dial indicator extensions and anvils)
- Patents US10184772, UA144230, UA126928, UA2022050400
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER**: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))





| Item No   | Range   | Resolut. | Accur. | Motorized | Touch Probe | 2D connection | Measuring HUB | Graphic | Analog scale | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Memory | WIRELESS | USB |
|-----------|---------|----------|--------|-----------|-------------|---------------|---------------|---------|--------------|--------|---------|---------|---------|-------|-----------|-------------|-------------|--------|----------|-----|
|           | mm      | mm       | μm     |           |             |               |               |         |              |        |         |         |         |       |           |             |             |        |          |     |
| 144303281 | 20-320  |          | ±10    | •         | •           | •             | •             | •       | •            | •      | •       | •       | •       | •     | •         | •           | •           | •      | •        | •   |
| 144306281 | 20-620  | 0,001    | ±15    | •         | •           | •             | •             | •       | •            | •      | •       | •       | •       | •     | •         | •           | •           | •      | •        | •   |
| 144310281 | 20-1020 |          | ±20    | •         | •           | •             | •             | •       | •            | •      | •       | •       | •       | •     | •         | •           | •           | •      | •        | •   |

## DOWNLOAD APP



## OPTIONAL ACCESSORIES

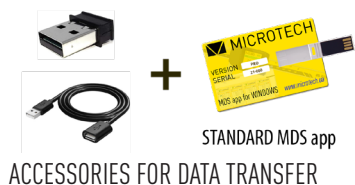


MADE IN UKRAINE

- Industry 4.0 adopted Tablet double column micron height gauge with computerized MICS system with 3.5" color Touchscreen
- **MOTORIZED** 2D height gauge with **NON-CONTACT (Laser)** axis
- Patents US10184772, UA144230, UA126928, UA2022050400
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER**: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



| Item No   | Range   |     | Resolut. |       | Accur. | LASER sensor | 2D connection | Measuring HUB | Graphic | Analog scale | Preset | Go/NoGo | Max/Min | Formula | Timer | Memory | WIRELESS | USB |
|-----------|---------|-----|----------|-------|--------|--------------|---------------|---------------|---------|--------------|--------|---------|---------|---------|-------|--------|----------|-----|
|           | Z       | X   | Z        | X     |        |              |               |               |         |              |        |         |         |         |       |        |          |     |
|           | mm      | mm  | mm       | mm    |        |              |               |               |         |              |        |         |         |         |       |        |          |     |
| 144303391 | 30-330  | ±4  | 0,001    | 0,002 | ±15    | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |
| 144303392 |         | ±20 |          | 0,010 |        | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |
| 144306391 | 30-630  | ±4  |          | 0,002 | ±20    | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |
| 144306392 |         | ±20 |          | 0,010 |        | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |
| 144310391 | 30-1030 | ±4  |          | 0,002 | ±30    | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |
| 144310392 |         | ±20 |          | 0,010 |        | •            | •             | •             | •       | •            | •      | •       | •       | •       | •     | •      | •        | •   |



ON-LINE  
GRAPHIC MODE

