



- Industry 4.0 adopted Intelligent caliper with computerized MICS system (Patents US10184772, UA174949, UA126928)
- **ENERGY ECONOMY** 2.13" E-ink display (200+ working hours / 1 charging)
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Resolution selecting, Connection indication
- **Memory manager:** 1000 values, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- **Calibration certificate included (ISO17025 (Ilac MRA))**

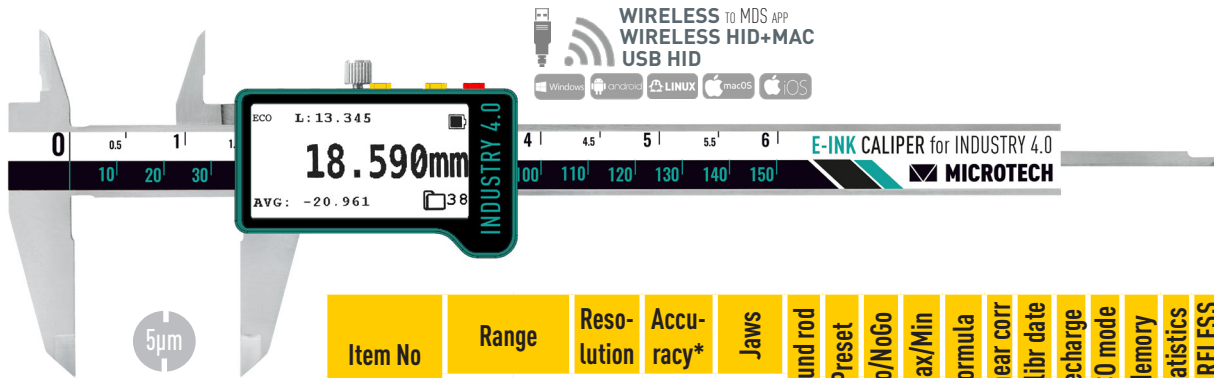

Item No	Range		Reso- lution	Accu- racy*	Jaws	Round rod	Preset	Go/NoGo	Max/Min	Formula	Linear corr	Calibr date	Recharge	ECO mode	Memory	Statistics	WIRELESS	USB HID	FW update	Display
	mm	inch																		
141093015B	0-150	0-6"	0,005	±15	40/16										1000 val					E-ink 2.13"
141093015R																				
141093020B																				
141093030B																				


### E-INK CALIPER CARBIDE JAWS

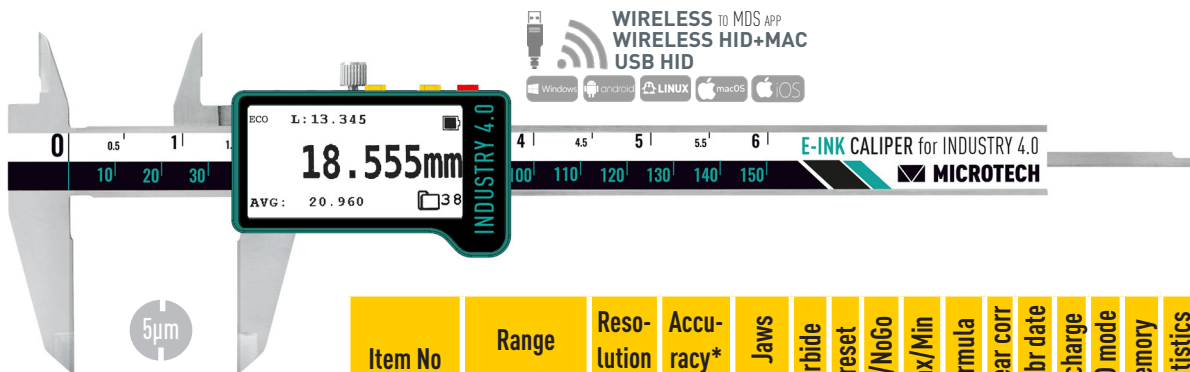

UPPER AND LOWER CARBIDE JAWS

Item No	Range		Reso- lution	Accu- racy*	Jaws	Carbide	Preset	Go/NoGo	Max/Min	Formula	Linear corr	Calibr date	Recharge	ECO mode	Memory	Statistics	WIRELESS	USB HID	FW update	Display
	mm	inch																		
141093015C	0-150	0-6"	0,005	±15	40/16										1000 val					E-ink
141093020C																				
141093030C																				


### E-INK CALIPER POINTS JAWS

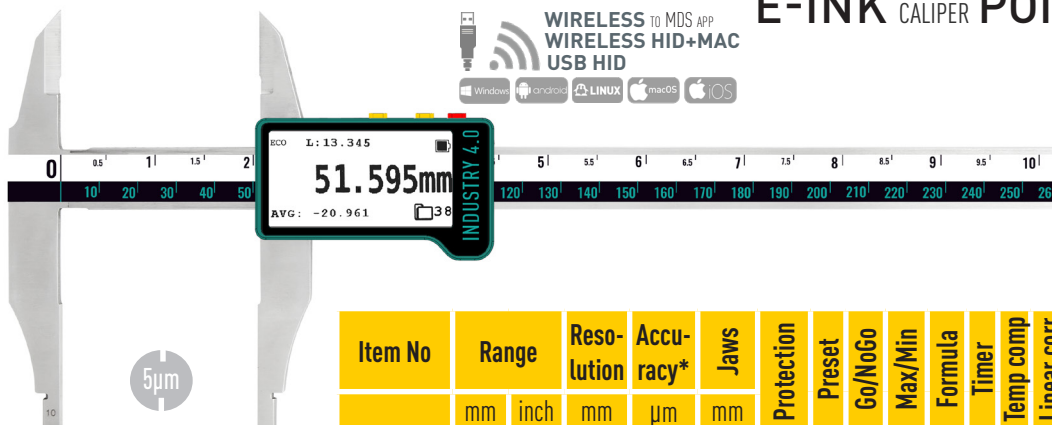

Item No	Range		Reso- lution	Accu- racy*	Jaws	Protection	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Auto off	Memory	Statistics	WIRELESS	USB HID
	mm	inch																		
141093321B	0-300	0-12"	0,005	±15	60/40	IP54														


\*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1

- Industry 4.0 adopted Intelligent caliper with computerized MICS system (Patents US10184772, UA174949, UA126928)
- **ENERGY ECONOMY** 2.13" E-ink display (200+ working hours / 1 charging)
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Resolution selecting, Connection indication
- **Memory manager:** 1000 values, Statistics mode, Memory data transfer
- Modification with **Double Force** control module with 8N external and 4N internal FORCE
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))

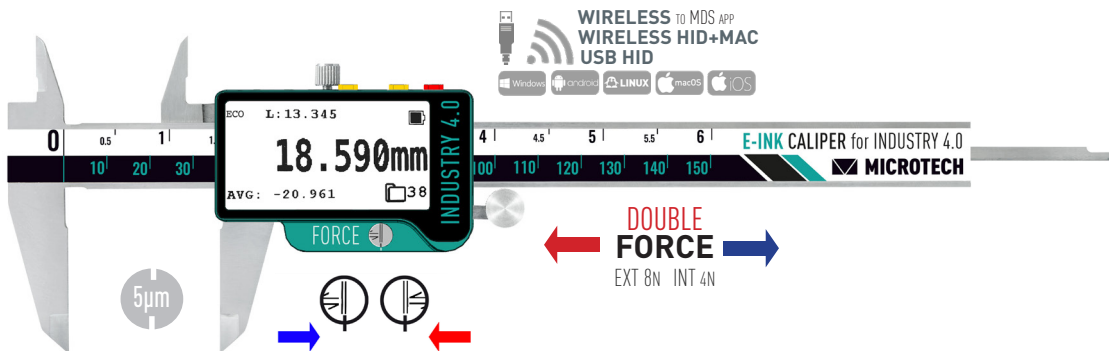


Item No	Range		Reso- lution	Accu- racy*	Force	Jaws	Round rod	Preset	Go/NoGo	Max/Min	Formula	Linear corr	Calibr date	Recharge	ECO mode	Memory	Statistics	WIRELESS	USB HID	FW update	Display				
	mm	inch																				mm	µm	N	mm
141093015F	0-150	0-6"	0,005	±10	8 / 4	40/16		•	•	•	•	•	•	•	•	1000 val	•	•	•	•	E-ink 2.13"				
141093015FR										•	•	•	•	•	•		•	•		•		•	•	•	
141093020F	0-200	0-8"								50/17		•	•	•	•		•	•	•			•	•	•	•
141093030F	0-300	0-12"						±15		60/20		•	•	•	•		•	•	•			•	•	•	•

## E-INK FORCE CALIPER POINTS JAWS

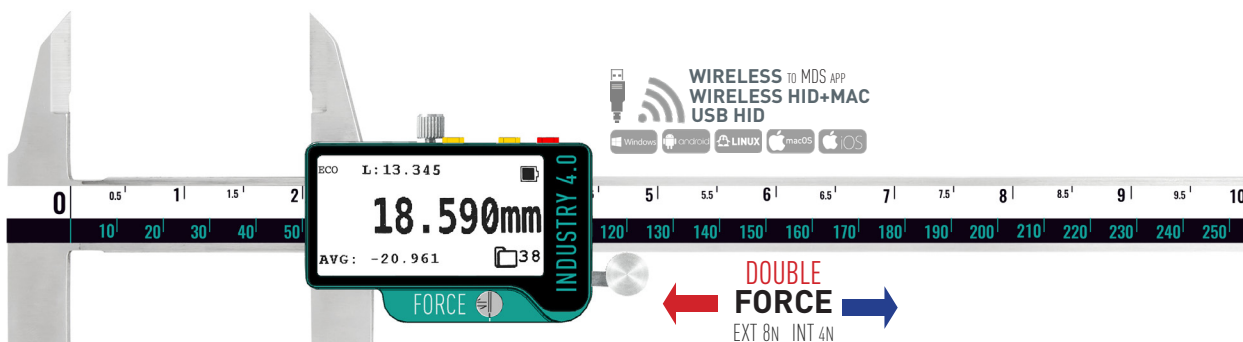

Item No	Range		Reso- lution	Accu- racy*	Force	Jaws	Protection	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Auto off	Memory	Statistics	WIRELESS	USB HID	
	mm	inch																				mm
141093321F	0-300	0-12"	0,005	±20	8 / 4	60/40	IP54	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

### OPTIONAL ACCESSORIES



### DOWNLOAD APP



\*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1