



- Industry 4.0 adopted sub-micron Tablet indicator with computerized MICS system with 2.4" color Touchscreen
- Patents UA126928, UA99686, UA2022050400
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



ON-LINE GRAPHIC MODE



RANGE UP TO 150MM

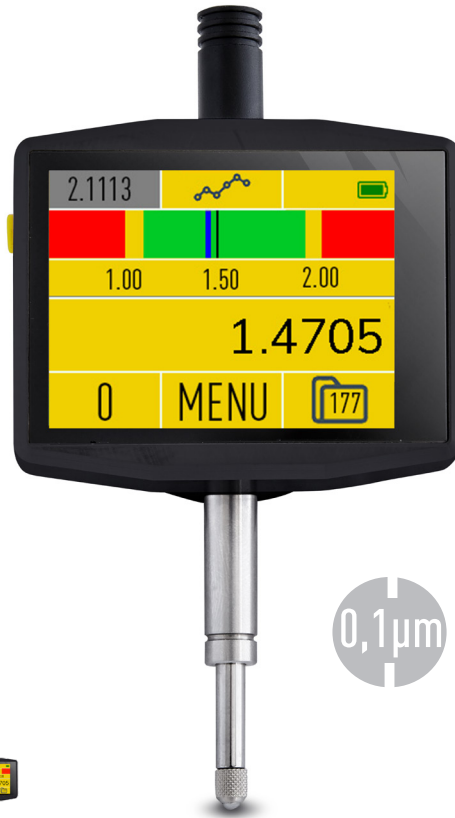

0,1µm



MEASURING HUB
MICROTECH DEVICES CONNECT

DOWNLOAD APP



Item No	Range		Reso- lution	Accu- racy.	Hyste- resis	Force	2D connect	Measuring HUB	Graphic	Analog scale	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	Display								
	mm	inch																							mm	µm	µm	N				
120139135	0-12,5	0-0,5"	0,0001	±3,0	0,5	0,6-1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update	Touchscreen 2,4"								
120139137				±2,0			•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•					
120139138				±1,6			•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•				
120139139				±1,2			•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•				
120139257	0-25,4	0-1"		±3,0		0,7-1.2	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•		
120139258				±2,0			•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	
120139259				±1,6			•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	•
120139505	0-50,8	0-2"		±5,0		1,2-2.2	•	3.2-5.2	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•		
120139508				±3,0			•		•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	•
120139509				±2,0			•		•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	•
120139905	0-100	0-4"		±7,0		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•		
120139907				±5,0		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	
120139908				±3,0		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	•
120139503	0-150	0-6"		±9,0		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	
120139505				±7,0		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•	•	
120139507			±5,0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						